

AZZURRA

CUSTOMER: SHADOW Shades & More
BRAND: AZZURRA
ADDRESS 1: Office 106, First Floor Trivium Sqr Bld
ADDRESS 2: Northern 90 Street , New Cairo
ZIP CODE: 11511
CITY: Cairo
COUNTRY: EG

FEATURES

Ø40 Radio tubular motor mono directional 433,42MHz

- **Technology:** Radio mono directional 433,42MHz
- **Motor Head:** Round
- **Nr of end limits:** 2 + intermediate position
- **Adjustment type:** Electronic
- **End limits setting tool:** remote control
- **Basic crown for tube Ø:**
- **Nominal voltage:** 230V~ / 50Hz
- **Thermal time:** 4 minutes in accordance with EN 60335-2-97
- **Obstacle detection:** NO
- **Freeze detection:** YES
- **System of protection:** IP 44
- **Insulation class:** II
- **Temperature working range:** - 20°C to + 70°C
- **Activation:** by remote control 433,42MHz
- **Parallel connection:** YES
- **Radio compatibility:** YES with controls 433,42MHz
- **Transmission frequency:** 433,42MHz
- **Coding:** Rolling code 16 million of possibilities
- **Memory capacity:** 12 remote controls - 1 sensor
- **Range:** 20 m with 2 reinforced concrete walls to be passed through
- **Made in:** Tunisia
- **Certifications:** CE - CMIM - NF - VDE



HEAD AESTHETICS

Plastic cap color:
GREY

Logo on the cap:
NO



TUBE AESTHETICS

Tube color:
RAL 5010 Gentian Blue
FE360 UNI EN 10305-3-2010



CABLE TYPE:

Unpluggable

H05 VVF 2 x 0,75 L. 3 m -
White



CABLE CONNECTOR


NO

**NOT INCLUDED
IN THIS CONFIGURATION**

COMPLIANCE

EN 62233
 EN 60 335-2-97
 EN 301 489-3 V1.6.1:2013
 EN 301 489-1 V1.9.2:2011
 EN 300220-1 V3.1.1:2017
 EN 300220-2 V3.1.1:2017
 EN 55014-2:2015
 EN 55014-1:2006 + A1:2009 + A2:2011

DIMENSIONS

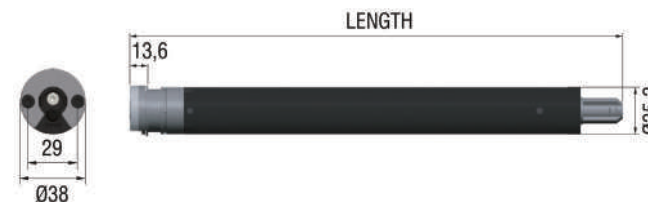

TECHNICAL DATA

REFERENCE	CUSTOMER REFERENCE	DESIGNATION	NOMINAL TORQUE	NOMINAL SPEED	NOISE LEVEL	RATED POWER	RATED CURRENT	CAPACITY OF THE LSU	LENGTH	MOTOR WEIGHT	FORECAST ANNUAL VOLUMES
9800404	/	AZ D40 R 3/30	3 Nm	30 Rpm	52 dBA	90 W	0,39 A	infinite	508 mm	1,15 Kg	500
9800405	/	AZ D40 R 9/16	9 Nm	16 Rpm	54 dBA	110 W	0,48 A	infinite	508 mm	1,15 Kg	500