



FEATURES

Ø40 Mechanical wired tubular motor

- **Technology:** Mechanical wired
- **Motor Head:** Round
- **Nr of end limits:** 2
- **Adjustment type:** PA (Progressive Adjustment)
- **End limits setting tool:** flexible thumbscrew driver
- **Basic crown for tube Ø:**
- **Nominal voltage:** 230V~ / 50Hz
- **Thermal time:** 4 minutes in accordance with EN 60335-2-97
- **Obstacle detection:** NO
- **Freeze detection:** NO
- **System of protection:** IP 44
- **Insulation class:** II
- **Temperature working range:** - 20°C to + 70°C
- **Activation:** by button
- **Parallel connection:** YES with QMC4
- **Radio compatibility:** YES with radio receivers 433,42MHz
- **Transmission frequency:** /
- **Coding:**
- **Memory capacity:**
- **Range:**
- **Made in:** Tunisia
- **Certifications:** CE - CMIM - NF - VDE



HEAD AESTHETICS

Plastic cap color:
GREY


Logo on the cap:
NO



CABLE TYPE:

Unpluggable

H05 VVF 3 x 0,75 L. 2,5 m
White



TUBE AESTHETICS

Tube color:
RAL 5010 Gentian Blue
FE360 UNI EN 10305-3-2010




CABLE CONNECTOR
NO

**NOT INCLUDED
IN THIS CONFIGURATION**

COMPLIANCE

EN 62233
EN 60 335-2-97
EN 55014-2:2015
EN 55014-1:2006 + A1:2009 + A2:2011

DIMENSIONS

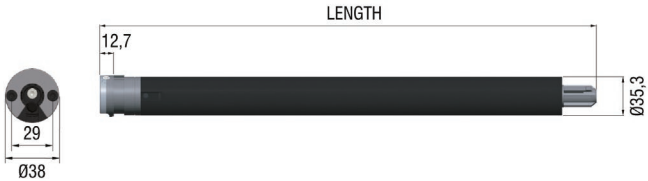

TECHNICAL DATA

REFERENCE	CUSTOMER REFERENCE	DESIGNATION	NOMINAL TORQUE	NOMINAL SPEED	NOISE LEVEL	RATED POWER	RATED CURRENT	CAPACITY OF THE LSU	LENGTH	MOTOR WEIGHT	FORECAST ANNUAL VOLUMES
9800402	/	AZ D40 W 3/30	3 Nm	30 Rpm	50 dBA	90 W	0,39 A	40 shaft turns	482 mm	0,95 Kg	200
9800403	/	AZ D40 W 9/16	9 Nm	16 Rpm	52 dBA	110 W	0,48 A	40 shaft turns	482 mm	1,05 Kg	200